



Please write clearly in block capitals.

Centre number

| | | | | |
|--|--|--|--|--|
| | | | | |
|--|--|--|--|--|

Candidate number

| | | | |
|--|--|--|--|
| | | | |
|--|--|--|--|

Surname

Forename(s)

Candidate signature

GCSE ENGINEERING

Unit 1 Written Paper

Wednesday 22 May 2019

Morning

Time allowed: 2 hours

Materials

For this paper you must have:

- normal writing and drawing instruments
- a calculator.

Instructions

- Use black ink or black ball-point pen. Use pencil only for drawing.
- Fill in the boxes at the top of this page.
- Answer **all** questions.
- You must answer the questions in the spaces provided. Do not write outside the box around each page or on blank pages.
- Some questions will require you to shade a circle. If you make a mistake cross through the incorrect answer.
- Do all rough work in this book. Cross through any work you do not want to be marked.

Information

- The marks for questions are shown in brackets.
- The maximum mark for this paper is 120.
- You are reminded of the need for good English and clear presentation in your answers.

| For Examiner's Use | |
|--------------------|------|
| Question | Mark |
| 1 | |
| 2 | |
| 3 | |
| 4 | |
| 5 | |
| 6 | |
| 7 | |
| 8 | |
| 9 | |
| 10 | |
| 11 | |
| 12 | |
| TOTAL | |



J U N 1 9 8 8 5 2 W 0 1

IB/M/Jun19/E9

8852/W

Answer **all** questions in the spaces provided.

For each answer completely fill in the circle alongside the appropriate answer.

CORRECT METHOD



WRONG METHODS



If you want to change your answer you must cross out your original answer as shown.



If you wish to return to an answer previously crossed out, ring the answer you now wish to select as shown.



0 1 . 1 The list below shows a range of different materials.

Shade the circles next to the **two** alloys.

[2 marks]

A Aluminium

B Brass

C Bronze

D Copper

E Lead

F Zinc

0 1 . 2 Which **one** of the following properties best describes the ability of steel to be pressed or rolled into thin sheets?

[1 mark]

A Ductility

B Hardness

C Malleability

D Toughness



0 1 . 3 Complete the following statement using the word bank provided.

[3 marks]

Annealing is a heat treatment process which reduces the _____ of a material, and helps to increase its _____. Some materials, like copper, can be cooled quickly during the annealing process by _____.

Word bank

ductility, galvanising, hardness, normalising, quenching, sintering, stiffness, strength, toughness

0 1 . 4 Shade **one** circle that gives the name of the process described below:

The joining of two metal parts by heating both surfaces together to the point of melting.

[1 mark]

A Brazing

B Milling

C Soldering

D Welding

0 1 . 5 Which of the following shows a dimension of more than 35 mm?

[1 mark]

A = 35 mm

B < 35 mm

C > 35 mm

D \pm 35 mm

Turn over ►



0 1 . 6 Which is the correct equation for calculating pressure?

[1 mark]

A $P=A/F$

B $P=F/A$

C $P=F \times A$

0 1 . 7 Which **one** of the following is a composite material?

[1 mark]

A Cast iron

B Polycarbonate

C Structural concrete

D Vulcanised rubber

10



0 2

A car body shell is shown in **Figure 1**.**Figure 1**

0 2 . 1

Aluminium alloy and low carbon steel can be used when manufacturing car bodies. Compare the **two** materials in terms of the following:

[4 marks]

Differences _____

Shared characteristics _____

0 2 . 2

Analyse the **two** materials in terms of ease of manufacturing car bodies.**[2 marks]**

Turn over ►



0 3

A chain and sprocket is shown in **Figure 2**.

A pulley and belt is shown in **Figure 3**.

Figure 2

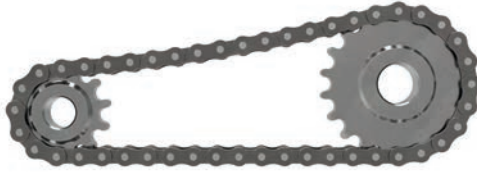


Figure 3



0 3 . 1

The rear wheel of a motorbike can be driven by a chain and sprocket or a pulley and belt.

Give **two** advantages and **two** disadvantages of using a chain and sprocket rather than a pulley and belt.

[4 marks]

Advantage 1 _____

Advantage 2 _____

Disadvantage 1 _____

Disadvantage 2 _____



0 3 . 2

In a chain and sprocket system, the driver sprocket has 13 teeth.

If a gear ratio of 1:3 is required, calculate how many teeth are needed on the driven sprocket.

You **must** show your working and the formula you are using.

[3 marks]

Formula _____


Working _____

Answer _____

0 3 . 3

An axle for a motorbike wheel is manufactured from a 30 mm diameter steel bar by sawing and machining.

Figure 4 shows a drawing of the finished axle. All dimensions are in mm.

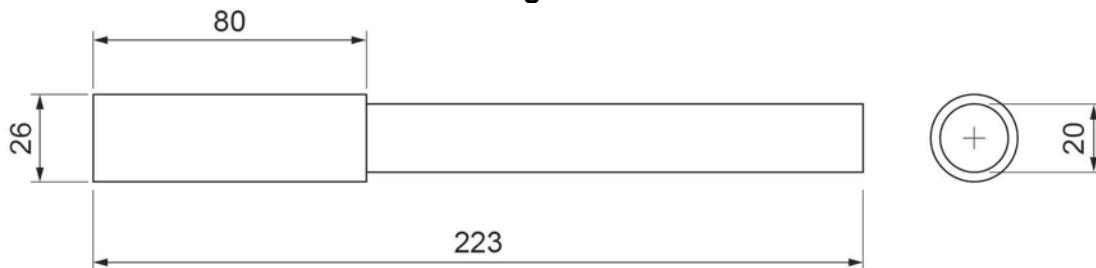Figure 4

Calculate how many axles can be sawn from a 1.5 m long steel bar.

The saw cut is 2 mm wide.

[2 marks]

Working _____


Answer _____

Turn over ►

0 3 . 4

Using notes and sketches, describe how the steel bar would be turned to the correct dimensions for the axle using a centre lathe.

Include the names of tools and processes, and safety issues.

[8 marks]

0 3 . 5

Name **two** tools that could be used to measure the diameter of the turned axle to an accuracy of 0.01 mm.

[2 marks]


Tool 1 _____

Tool 2 _____

0 3 . 6

To help secure the axle to a motorbike, a nut and steel washer are needed.

The washer is punched from a piece of square sheet steel measuring 32 mm x 32 mm.

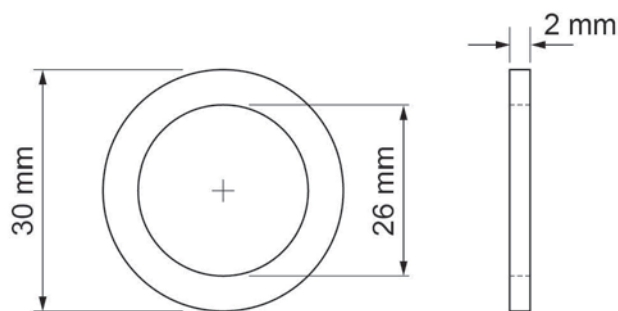

Calculate the percentage (%) of waste material produced during the production of one washer.

You should assume a value for pi (π) of 3.142

[6 marks]

Working _____

Answer _____

Turn over ►



03.7

The washer and the axle have a surface finish applied to them.

Give **two** reasons why engineered parts have surface finishes applied.

[2 marks]

Reason 1 _____

Reason 2 _____

03.8

Name **one** surface finishing process that would give a **zinc coating** to the steel washer.

[1 mark]

28



0 4 . 1

An engineering company is designing a ladder for use when installing satellite television dishes. The ladder must be able to be carried easily by one person.

Identify a suitable non-metallic material for the ladder and give **two** reasons for your choice.

[3 marks]


Material _____

Reason 1 _____

Reason 2 _____

0 4 . 2

The ladder needs to reach a height of 5 metres and must stand at least 2 metres away from the base of the wall for safety reasons.

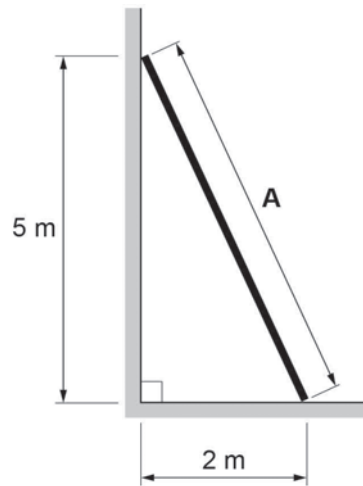

Calculate the minimum length of the ladder (**A**). Give your answer in **millimetres**.

You **must** show your working.

[3 marks]

Working _____

Answer _____ mm

6

Turn over ►



0 5 . 1

A company that makes fishing line wants to carry out some tests to check the strength of the material.

State which force is applied when an item is stretched.

[1 mark]

0 5 . 2

To test the strength of the line, one end is secured in a clamp, and a weight is hung from the other end.

The length of the line is measured and then the weight increased. Each time the weight increases, the length of the line is measured again.

The results of the test are shown in **Figure 5**.

Figure 5

| | | | | | | | | | |
|-------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Weight (g) | 0 | 50 | 100 | 150 | 200 | 250 | 300 | 350 | 400 |
| Length (mm) | 300 | 302 | 305 | 311 | 318 | 326 | 335 | 345 | 356 |

Using the equation below, calculate the strain if a weight of 400 grams is applied to the fishing line. Show your working.

$$\text{Strain} = \text{change in length/original length} \quad (\epsilon = \delta/l)$$

[2 marks]

Working _____

Answer _____

0 5 . 3

Refer to **Figure 5**. Calculate the percentage (%) change in length when a weight of 300 grams is applied to the line. Show your working.

Give your answer to **one** decimal place.

[2 marks]

Working _____

Answer _____




0 5 . 4

On the grid below, and using all the data given in **Figure 5**, plot a graph to show the relationship between the weight applied to the fishing line and the change in length.

Marks will be awarded for:

- labelling the axes
- plotting the data onto the graph
- drawing a trend line onto the plotted data.

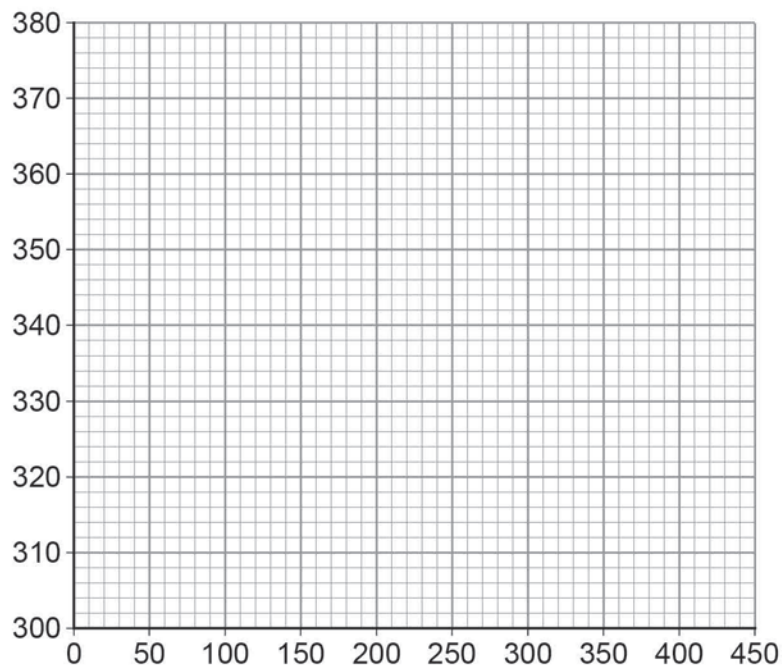[4 marks]

0 5 . 5

Estimate the length of the fishing line if the weight being applied is 450 grams.


[1 mark]

| |
|----|
| |
| 10 |

Turn over ►

0 6 . 1 Study the diagram of the mechanical system shown in **Figure 6**.

Figure 6

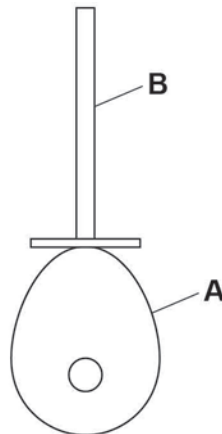

Complete the following statements:

[4 marks]

Part **A** is a _____ and part **B** is a _____.

The mechanical system converts _____ motion
into _____ motion.

0 6 . 2 **Figure 7** shows a component often used in mechanical systems.

Figure 7



Name the component shown in **Figure 7**.

[1 mark]

Answer _____



0 6 . 3

Give **two** reasons why the component in **Figure 7** is used in mechanical systems.**[2 marks]**

Reason 1 _____

Reason 2 _____

7

0 7

The capacity of a water bottle needs to be 750 ml.

Calculate the minimum height of the bottle if the diameter of the bottle is 70 mm.

You **must** show your working.**[5 marks]**

Formula for volume of cylinder _____

Working _____

Answer with units _____

5

Turn over ►



0 9 . 1

Figure 9 shows a secure entry system for a school door. The door is opened using a keypad.

Figure 9



An example of an operating requirement for the system is given below:

Requirement: The door can only be opened when the correct code is entered on the keypad.

Reason: So only authorised people can enter the school.

Give two **additional** operating requirements, and explain why each requirement is important.

[4 marks]

Requirement 1 _____

Reason _____

Requirement 2 _____

Reason _____



0 9 . 2

The entry system can be modified by replacing the keypad with a card reading device so that the door can be opened with a magnetic swipe-card.

Evaluate the use of a keypad and a swipe-card as methods of entry.

Select the most suitable method and give reasons for your choice.


[3 marks]

0 9 . 3

A system is designed to count and clearly display the number of people entering through the door in a day.

Complete the system diagram below by adding the names of input, process and output components that could be used so that the system works as intended.

[3 marks]

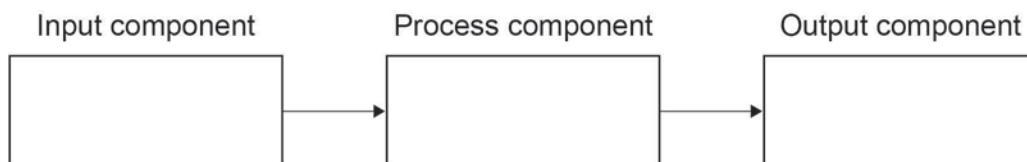


10

Turn over for the next question

Turn over ►



1 0

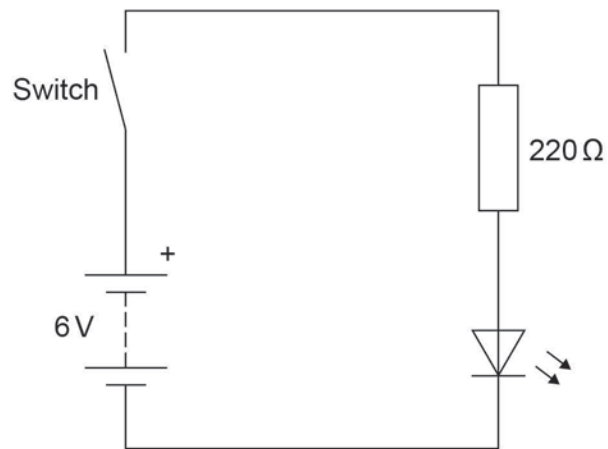A circuit diagram for a torch is shown in **Figure 10**.**Figure 10**

1 0 . 1

Using Ohm's law, calculate the current flowing through the circuit.

[4 marks]

Formula used _____

Working _____

Answer with units _____

1 0 . 2

Explain why a switch is required in the torch circuit.

[2 marks]




1 2

The system diagram in **Figure 13** represents an alarm system.

Sensor **A** and Sensor **B** are input components. The buzzer will sound if **either** of the sensors detects movement.

Figure 13

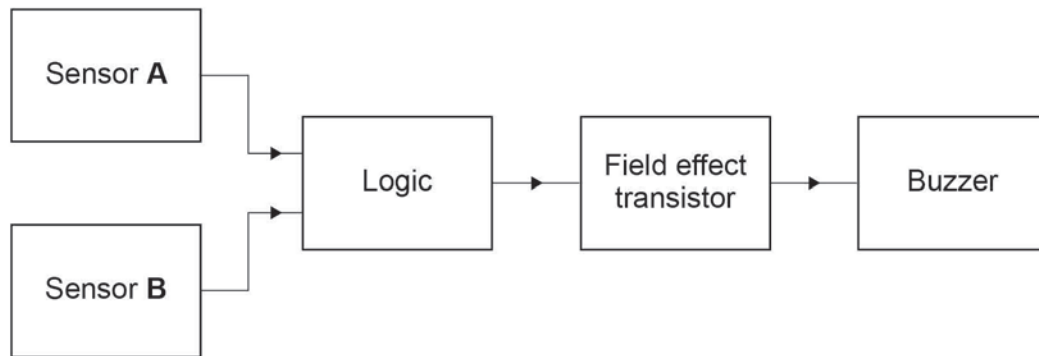

1 2

. 1

Which logic function would be needed for the alarm in **Figure 13** to work as intended?

Shade the circle next to the correct answer.

[1 mark]

A AND

B NOT

C OR

1 2

. 2

The Field Effect Transistor (FET) performs which function in the system?

[1 mark]

A Counter

B Input

C Interface

D Output



| | | | |
|---|---|---|---|
| 1 | 2 | . | 3 |
|---|---|---|---|

Explain why a FET is used in the alarm system shown in **Figure 13**.

[2 marks]

| |
|---|
| 4 |
|---|

END OF QUESTIONS



There are no questions printed on this page

*Do not write
outside the
box*

**DO NOT WRITE ON THIS PAGE
ANSWER IN THE SPACES PROVIDED**

Copyright information

For confidentiality purposes, from the November 2015 examination series, acknowledgements of third-party copyright material are published in a separate booklet rather than including them on the examination paper or support materials. This booklet is published after each examination series and is available for free download from www.aqa.org.uk after the live examination series.

Permission to reproduce all copyright material has been applied for. In some cases, efforts to contact copyright-holders may have been unsuccessful and AQA will be happy to rectify any omissions of acknowledgements. If you have any queries please contact the Copyright Team, AQA, Stag Hill House, Guildford, GU2 7XJ.

Copyright © 2019 AQA and its licensors. All rights reserved.



2 4



1 9 6 G 8 8 5 2 / W

IB/M/Jun19/8852/W