

Candidates answer on the Question Paper.

No Additional Materials are required.

To be taken together with Paper 1 in one session of 2 hours 15 minutes.

READ THESE INSTRUCTIONS FIRST

Write your Centre number, candidate number and name on all the work you hand in.Write in dark blue or black pen.You may use a soft pencil for any diagrams or graphs.Do not use staples, paper clips, highlighters, glue or correction fluid.DO NOT WRITE IN ANY BARCODES.

You may use a calculator. Section A Answer all questions. Section B Answer one question.


At the end of the examination, fasten all your work securely together.

The number of marks is given in brackets [] at the end of each question or part question.

For Examiner's Use		
Section A		
Section B		
Total		


This document consists of 18 printed pages and 2 blank pages.



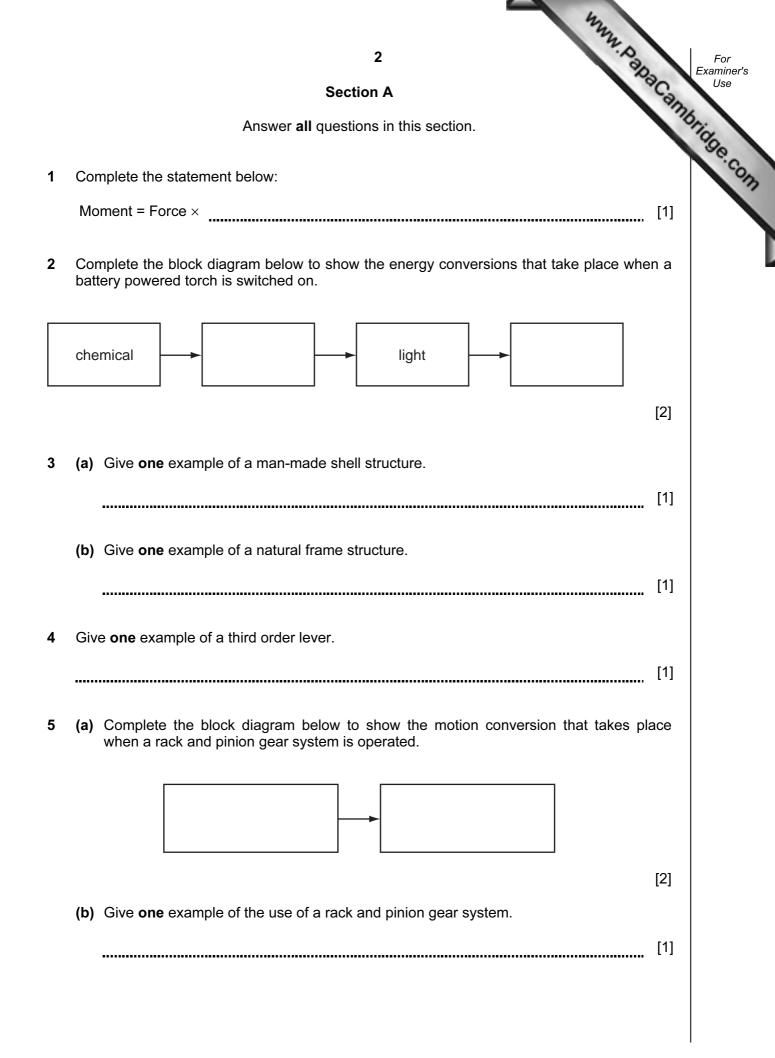

The table and diagram below show the colour code system for resistors. 6

table and diagra	m below show the	3 e colour code sy	vstem for resistors	www.papo	For Examiner Use
Colour	1 st band	2 nd band	3 rd band	4 th band	90
Black	0	0	-	Tolerance	6
Brown	1	1	0	band	
Red	2	2	00		
Orange	3	3	000		
Yellow	4	4	0000]	
Green	5	5	00000		
Blue	6	6	000000		
Violet	7	7	0000000		
Grey	8	8	0000000]	
White	9	9	00000000		

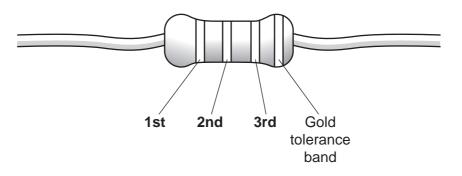

(a) State the colours of the bands for a 330 Ω resistor.


1 st band	 [1]
2 nd band	 [1]
3 rd band	 [1]

(b) Explain the use of the tolerance band.

[2]	1

7 Sketch and label the circuit symbol for an electrolytic capacitor.

8	4 Explain the structural term 'strut'.	acamb	For Examiner's Use
9	There are different forms of pulley belt. (a) Sketch and label a toothed belt.		SE.COM
		[2]	
	(b) Give one example of the use of a toothed belt.	[1]	
	(c) Explain one benefit of using a toothed belt.	[2]	
10	Name the transducer used to sense a change in temperature.	[1]	

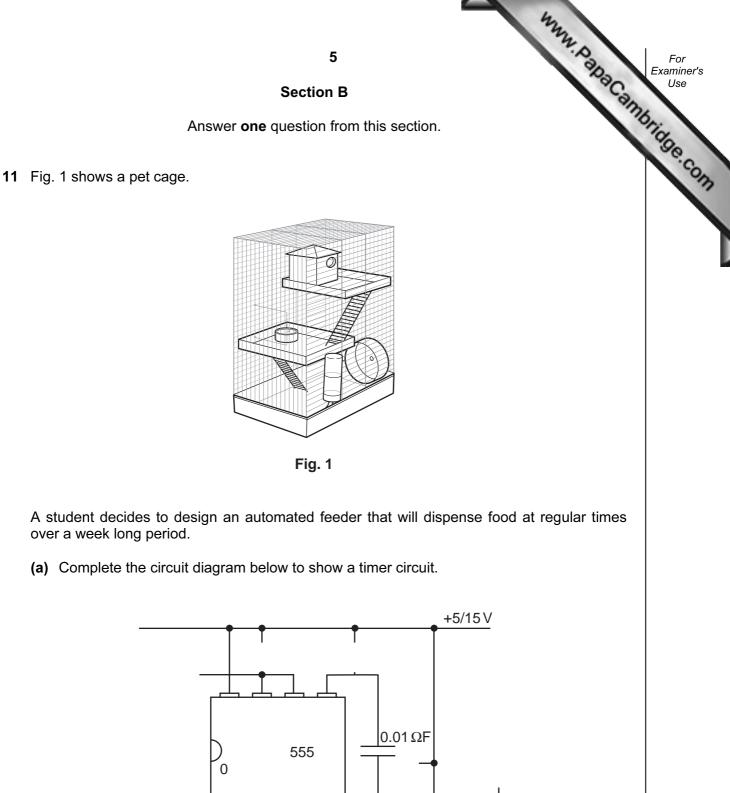

Α


0 V

start ·


0

С

[4]

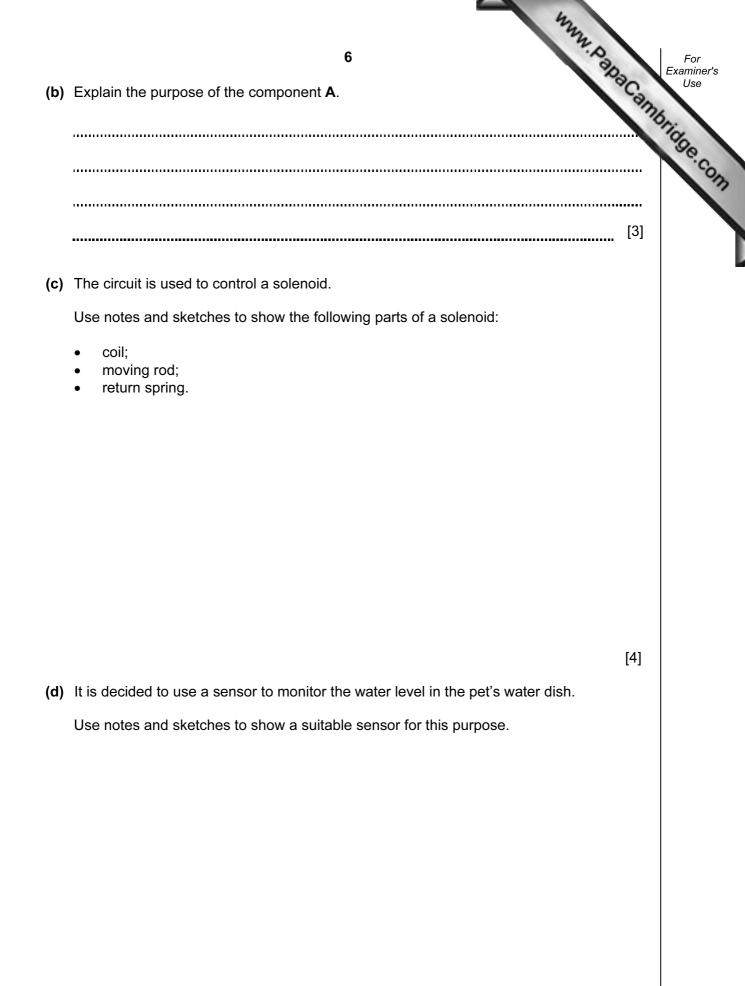

www.papacambridge.com (e) Fig. 2 shows a simple circuit that would sound a buzzer if the water level a below a pre-set level.





(i) Explain the purpose of component **D**.

..... [2] (ii) Explain the purpose of component E. [2]


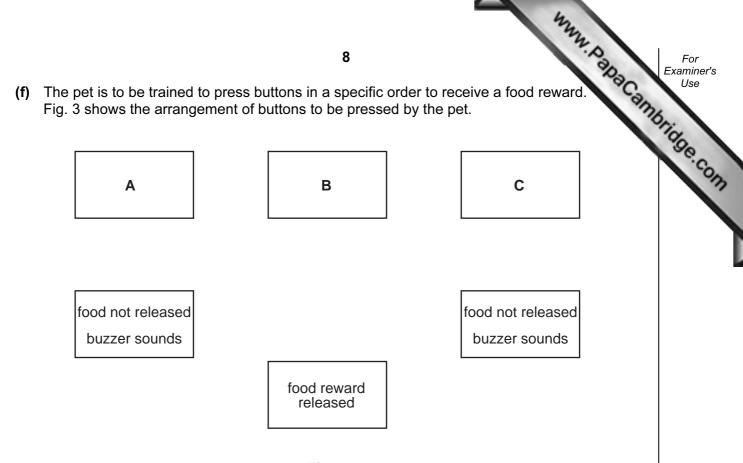


Fig. 3

Draw logic gates to show that the pet must press buttons A and C together to obtain food. If B is pressed in any combination a buzzer will sound and food will not be released.

[7]

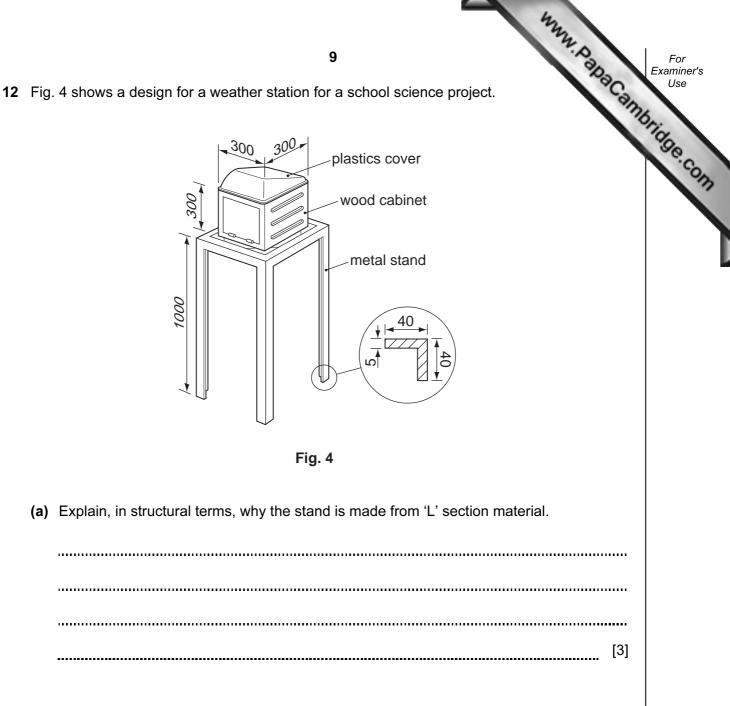


	The second states of the secon	
	10 Two types of structure are used in the design of the weather station.	For Examiner's
(b)	Two types of structure are used in the design of the weather station.	Use
	Name both types and give an example of each from Fig. 4.	bridge.com
	Name:	Se.Co.
	Example: [2]	137
	Name:	
	Example: [2]	
(c)	Identify one fault in the design of the stand; use sketches and notes to show how the fault can be corrected.	

[4]

(d) Screws are used to assemble the cabinet. When tightened one of the screws sheared off due to excessive force being applied.

Use sketches and notes to explain what is meant by 'shear'.

[3]

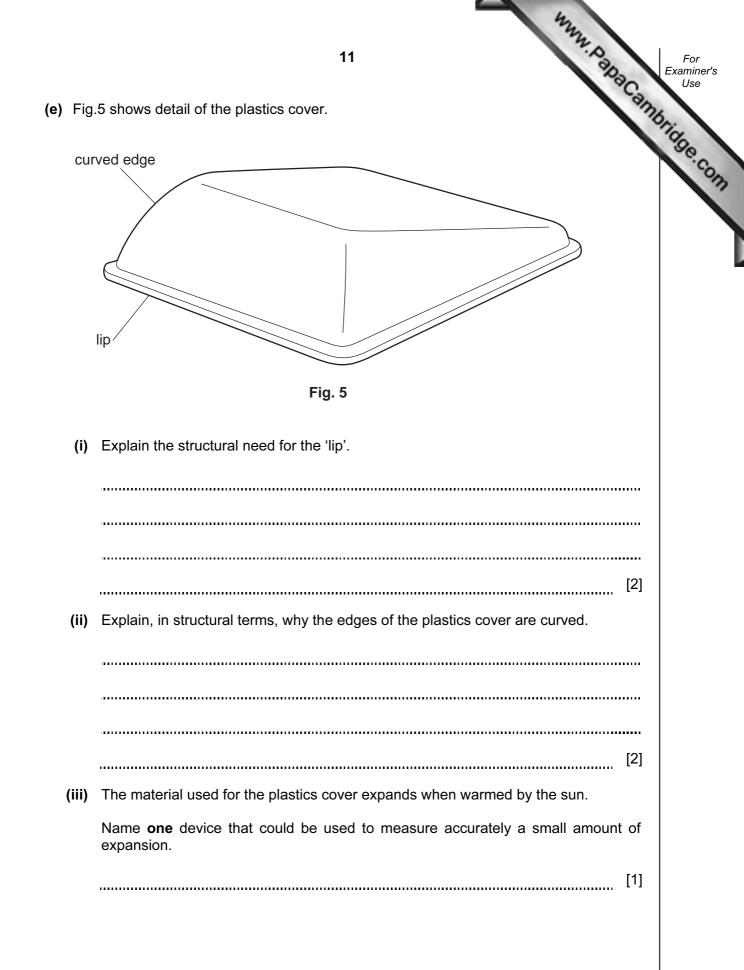

- (f) The material used to make the stand is mild steel.
- www.papacambridge.com (i) Complete a stress strain graph, on the axes given below, for mild steel and lab clearly the following features:
 - elastic region;
 - plastic region;
 - break point.

stress


strain

[3]

(ii) During installation of the weather station the legs of the stand are reduced in length by 0.01 mm.

Calculate the strain on the legs.

..... [3]

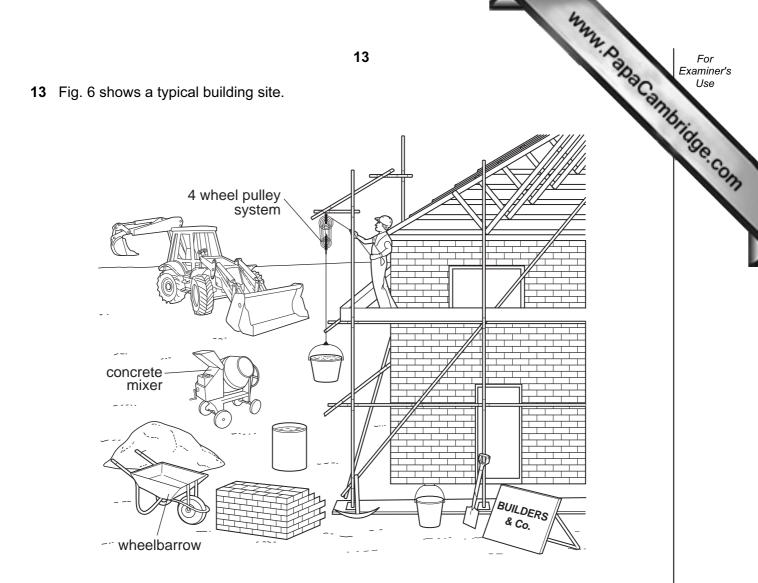






(a) The wheelbarrow is an example of the use of leverage.

Name two other items from Fig. 6 that use levers.


1	 [1]
2	 [1]

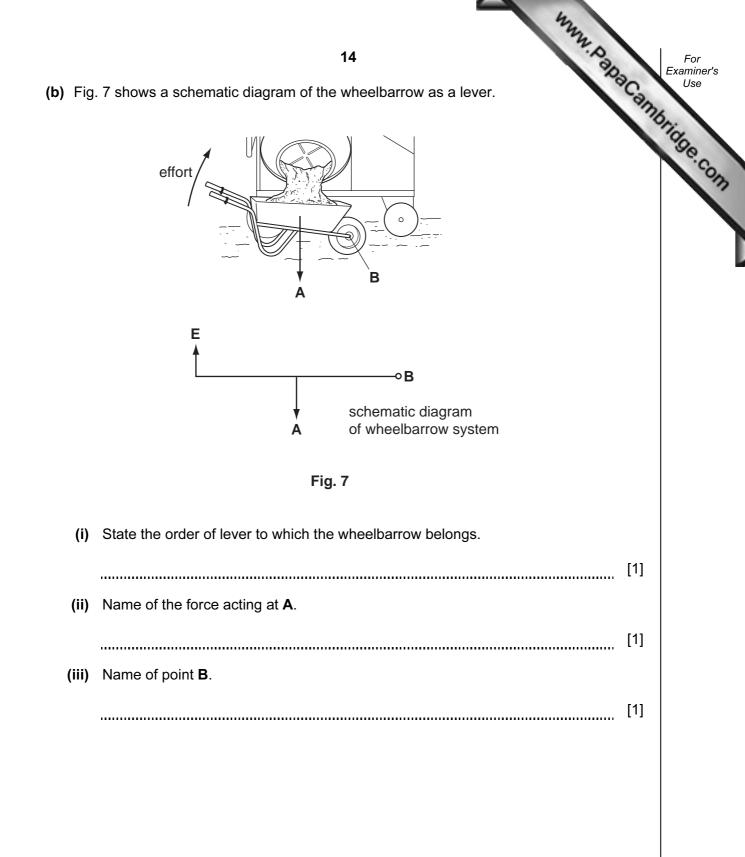

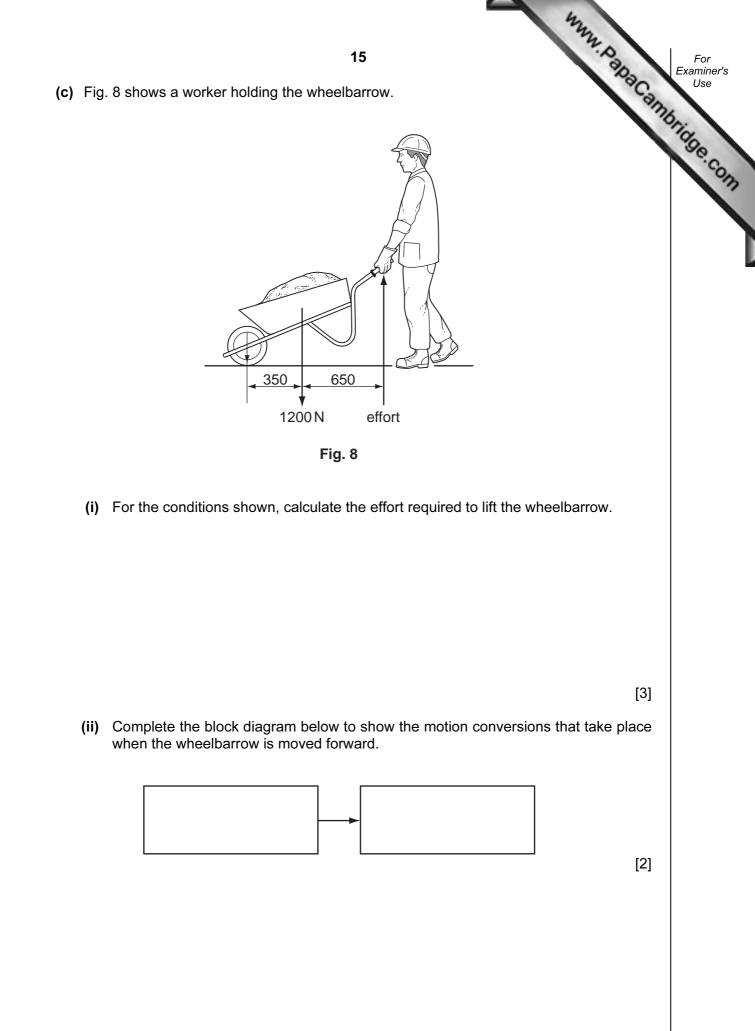

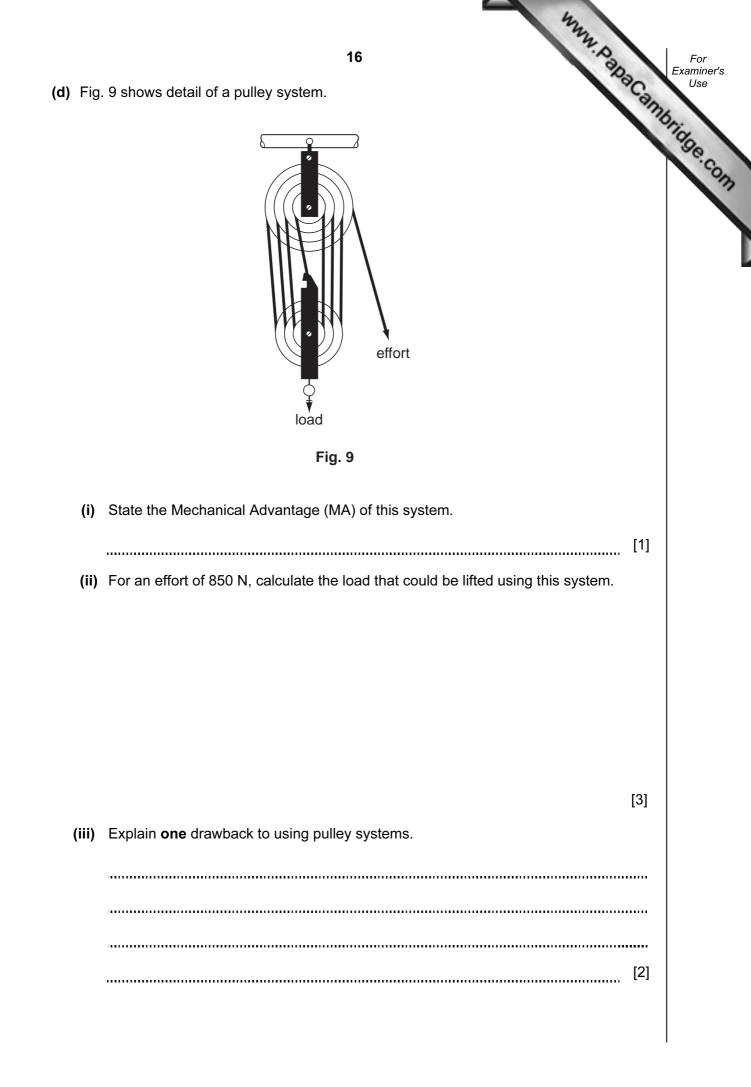

www.papaCambridge.com 17 (e) Fig. 10 shows part of the starting system for a cement mixer. gear Y 56t gear X 14t pulley rope starting handle Fig. 10 (i) Add arrows to Fig. 10 to show the direction of the motion of the gears as the starting handle is pulled. [2] (ii) Gear X turns gear Y to start the motor. Name gear X and gear Y. Choose, from the list below, words to complete the following sentences. driven driver idler spur worm Gear X is known as: [1] Gear **Y** is known as: [1] (iii) Calculate the Velocity Ratio (VR) for the gear system.

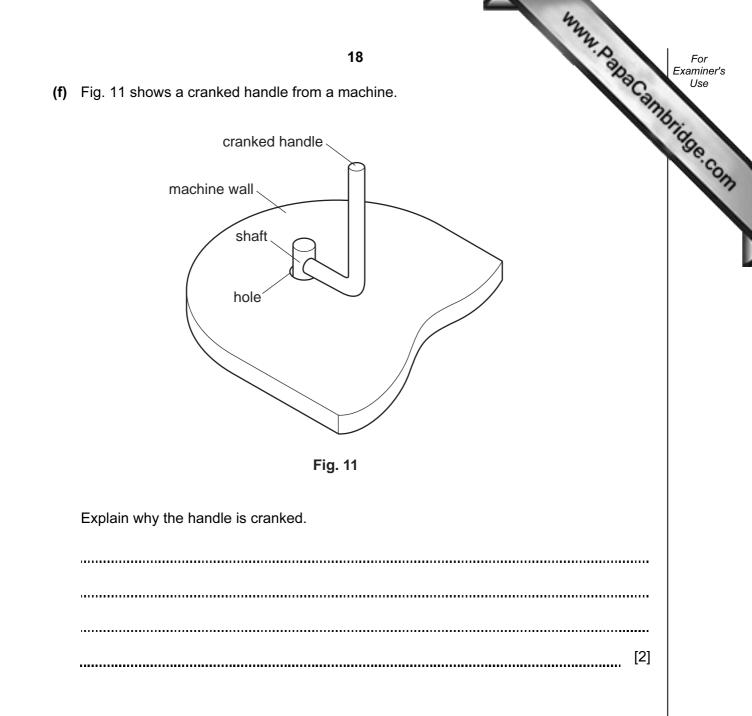



BLANK PAGE



BLANK PAGE

Permission to reproduce items where third-party owned material protected by copyright is included has been sought and cleared where possible. Every reasonable effort has been made by the publisher (UCLES) to trace copyright holders, but if any items requiring clearance have unwittingly been included, the publisher will be pleased to make amends at the earliest possible opportunity.

University of Cambridge International Examinations is part of the Cambridge Assessment Group. Cambridge Assessment is the brand name of University of