



**ADVANCED
General Certificate of Education
2012**

Mathematics
Assessment Unit M3
assessing
Module M3: Mechanics 3
[AMM31]

THURSDAY 21 JUNE, AFTERNOON

**MARK
SCHEME**

Introduction

The mark scheme normally provides the most popular solution to each question. Other solutions given by candidates are evaluated and credit given as appropriate; these alternative methods are not usually illustrated in the published mark scheme.

The marks awarded for each question are shown in the right hand column and they are prefixed by the letters **M**, **W** and **MW** as appropriate. The key to the mark scheme is given below:

M indicates marks for correct method.

W indicates marks for working.

MW indicates marks for combined method and working.

The solution to a question gains marks for correct method and marks for an accurate working based on this method. Where the method is not correct no marks can be given.

A later part of a question may require a candidate to use an answer obtained from an earlier part of the same question. A candidate who gets the wrong answer to the earlier part and goes on to the later part is naturally unaware that the wrong data is being used and is actually undertaking the solution of a parallel problem from the point at which the error occurred. If such a candidate continues to apply correct method, then the candidate's individual working must be followed through from the error. If no further errors are made, then the candidate is penalised only for the initial error. Solutions containing two or more working or transcription errors are treated in the same way. This process is usually referred to as "follow-through marking" and allows a candidate to gain credit for that part of a solution which follows a working or transcription error.

Positive marking:


It is our intention to reward candidates for any demonstration of relevant knowledge, skills or understanding. For this reason we adopt a policy of **following through** their answers, that is, having penalised a candidate for an error, we mark the succeeding parts of the question using the candidate's value or answers and award marks accordingly.

Some common examples of this occur in the following cases:

- (a) a numerical error in one entry in a table of values might lead to several answers being incorrect, but these might not be essentially separate errors;
- (b) readings taken from candidates' inaccurate graphs may not agree with the answers expected but might be consistent with the graphs drawn.

When the candidate misreads a question in such a way as to make the question easier only a proportion of the marks will be available (based on the professional judgement of the examining team).

1 (i)

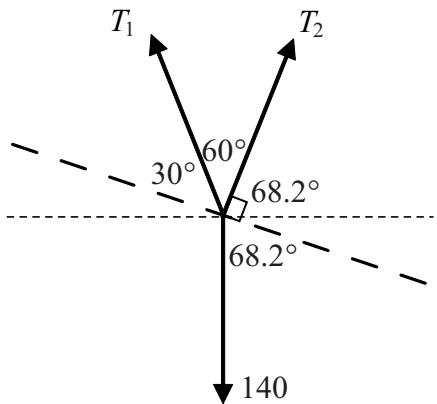Re \perp_R MD


$$T_1 \cos 30^\circ = 140 \cos 68.2^\circ$$

M1 W1

$$T_1 = \frac{140 \cos 68.2^\circ}{\cos 30^\circ}$$

$$= 60.03 \rightarrow 60.0 \text{ N}$$

W1

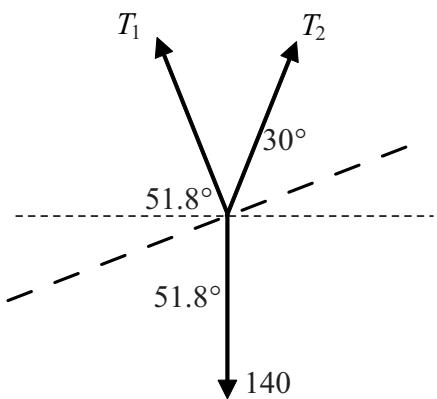Re \perp_R MC

$$T_2 \cos 30^\circ = 140 \cos 51.8^\circ$$

M1 W1

W1

$$T_2 = 99.97 \rightarrow 100 \text{ N}$$

(ii) $x = \frac{3}{8}(l+x)$

MW1

$$\frac{5}{8}x = \frac{3}{8}l$$

W1

$$\frac{x}{l} = \frac{3}{5}$$

$$60 = \frac{\lambda x}{l} = \frac{3}{5}\lambda$$

M1

$$\lambda = 100 \text{ N}$$

W1

10


<p>2 (i) $\overrightarrow{OB} = \begin{pmatrix} 5 \\ 5 \\ -2 \end{pmatrix}$, $\overrightarrow{OA} = \begin{pmatrix} 1 \\ 3 \\ 2 \end{pmatrix}$ $\therefore \overrightarrow{AB} = \begin{pmatrix} 4 \\ 2 \\ -4 \end{pmatrix}$ or $\overrightarrow{AB} = 2 \begin{pmatrix} 2 \\ 1 \\ -2 \end{pmatrix}$</p>	MW3	
$\therefore \mathbf{F}_1 \cdot \overrightarrow{AB} = 2 \begin{pmatrix} 3 \\ -6 \\ -2 \end{pmatrix} \cdot \begin{pmatrix} 2 \\ 1 \\ -2 \end{pmatrix}$ $= 2(6 - 6 + 4)$ $= 8 \text{ J}$	M1	W1
<p>(ii) The particle is moving in the direction of $\begin{pmatrix} 2 \\ 1 \\ -2 \end{pmatrix}$ so the resultant force must act in this direction.</p>		
<p>i.e. $\mathbf{R} = t \begin{pmatrix} 2 \\ 1 \\ -2 \end{pmatrix}$</p>	M1	
<p>(iii) $\mathbf{R} \cdot \overrightarrow{AB} = t \begin{pmatrix} 2 \\ 1 \\ -2 \end{pmatrix} \cdot 2 \begin{pmatrix} 2 \\ 1 \\ -2 \end{pmatrix}$</p> $= 2t(4 + 1 + 4)$ $= 18t \text{ J}$	M1	MW1
<p>(iv) By the W.E.P.</p>	M1	
$18t = \frac{1}{2} \times \frac{1}{2} (13^2 - 5^2)$ $= \frac{1}{4} \times 12^2 = 36$	W1	
$t = 2$	W1	
$\mathbf{R} = \begin{pmatrix} 4 \\ 2 \\ -4 \end{pmatrix}$	MW1	
$\begin{pmatrix} 4 \\ 2 \\ -4 \end{pmatrix} = \begin{pmatrix} 3 \\ -6 \\ -2 \end{pmatrix} + \mathbf{F}_2$	MW1	
$\mathbf{F}_2 = \begin{pmatrix} 1 \\ 8 \\ -2 \end{pmatrix}$	MW1	14

					AVAILABLE MARKS
3	(i)	$S = \frac{2r \sin \alpha}{3\alpha}$ and $\alpha = \frac{\pi}{2}$		M1	
		$\therefore S = \frac{2r \times 1}{\frac{3\pi}{2}} = \frac{4r}{3\pi}$		W1	
	(ii)	By area similarity		M1	
		large semicircle : small semicircle 9 : 1			
		Hence (large - small) semicircle = 9 - 1 = 8kg		W1	
	(iii)	Item mass _i \bar{x}_i \bar{x}_i		M1 M1	
		large semicircle 9 $\frac{1.2}{\pi}$ 0.38197 3.4377 W1			
		small semicircle 1 $0.3 + \frac{0.4}{\pi}$ 0.42732 0.4273 MW2			
		remainder 8 \bar{x} 3.0104 = 8 \bar{x}			
		$\bar{x} = 37.63 = 37.6 \text{ cm}$		W1	
	(iv)	Longest line through A is diameter AB		M1	
		\therefore Force acts through B, \perp_R AB		M1	
		$\therefore M \xrightarrow{A} 1.80F = 8g\bar{x}$		M1 W1	
		$F = \frac{8g\bar{x}}{1.80} = 16.389$ = 16.4 N (3sf)		W1	15

			AVAILABLE MARKS
4	(i)		
		at C $v^2 = \omega^2(a^2 - x^2)$	M1
		$3.24 = \omega^2(a^2 - (a - 0.2)^2)$	MW1
		$= \omega^2(a^2 - a^2 + 0.4a - 0.04)$	W1
		$81 = \omega^2(10a - 1)$	
	(ii) at D	$x = 0.6, v = 2.4$	
		$5.76 = \omega^2(a^2 - 0.36)$	MW1
		$576 = \omega^2(100a^2 - 36)$	
		$\therefore \frac{576}{81} = \frac{100a^2 - 36}{10a - 1} = \frac{64}{9}$	M1
		$640a - 64 = 900a^2 - 324$	W1
		$160a - 16 = 225a^2 - 81$	
		$225a^2 - 160a - 65 = 0$	
		$45a^2 - 32a - 13 = 0$	
		$(a - 1)(45a + 13) = 0$	M1 W1
		and $a > 0 \therefore a = 1$	W1
		$\therefore 81 = \omega^2(10 - 1)$	
		and $\omega > 0 \therefore \omega = 3$	MW1
	(iii)	$V_{\max} = a\omega = 3$	MW1
		$f_{\max} = a\omega^2 = 9$	MW1
			13

		AVAILABLE MARKS
5	(i) $W = \int_{x_1}^{x_2} -\frac{\lambda x}{l} dx$ $= -\left[\frac{\lambda x^2}{2l} \right]_{x_1}^{x_2}$ $= -\frac{\lambda}{2l} (x_2^2 - x_1^2)$	M1 MW1 W1
	(ii) Work done on particle as it is moved from P-Q By weight $3mga$ By 2 tensions $-2 \frac{\frac{1}{2}mg}{2 \times 2a} (9a^2 - 4a^2)$ $3mga - \frac{5}{4}mga = \frac{7}{4}mga$ $= 1.75mga$	MW1 M1 W1 W1
	(iii) By W.E.P. $\frac{1}{2}mv^2 = \frac{7}{4}mga$ $v = \sqrt{\frac{7}{2}ga}$	M1 W1
		9

6 (i)

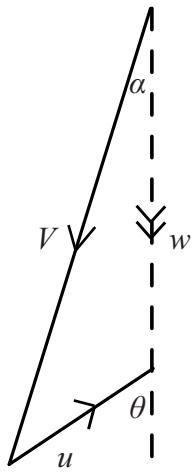

$$\text{E-W} \quad V \sin \alpha - u \sin \theta = 0$$


$$V \sin \alpha = u \sin \theta$$

M1

AVAILABLE MARKS

MW1

(ii)

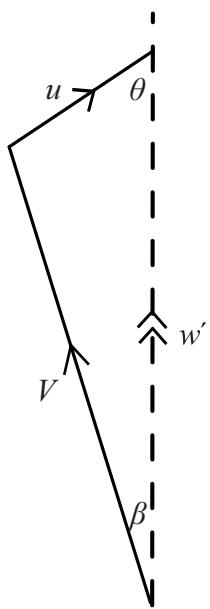

$$\text{E-W} \quad V \sin \beta = u \sin \theta$$

$$\sin \beta = \frac{u}{V} \sin \theta$$

$$\sin \beta = \frac{V}{V} \sin \alpha$$

$$\therefore \beta = \alpha$$

M1

M1

W1

(iii)

$$T = \frac{d}{w} + \frac{d}{w'}$$

M1

$$= \frac{d(w+w')}{ww'}$$

MW1

and $w = V \cos \alpha - u \cos \theta$
and $w' = V \cos \alpha + u \cos \theta$

M1 W1

MW1

$$\therefore T = \frac{2d V \cos \alpha}{V^2 \cos^2 \alpha - u^2 \cos^2 \theta}$$

W1

(iv) $V^2 \cos^2 \alpha = V^2 - V^2 \sin^2 \alpha$
 $= V^2 - u^2 \sin^2 \theta$

MW1

$$\therefore T = \frac{2d \sqrt{V^2 - u^2 \sin^2 \theta}}{V^2 - u^2}$$

MW1

(v) T is then a function of the independent variables.

M1

14

Total**75**